

DOUBLE DUAL™

AN INDUSTRY FIRST - TECTRAN'S ONE-PLUG SOLUTION! A patent pending, dual pole plug that is universally configured to function with **both vertical and horizontal** socket designs. One plug handles all your dual pole application needs! SAE J3082 Compliant

SIMPLIFIED CONNECTIONS - DOUBLE DUAL™ design innovation eliminates the need to stock multiple dual pole plug and cable assemblies. Simplify fleet equipment with this universal plug option.



TECTRAN'S ONE-PLUG SOLUTION for your Specialty Applications

- Tailgate Applications
- Tarp Systems
- Charging Systems



Tectran's Patent Pending
DOUBLE DUAL™

VERSATILITY ON THE VEHICLE - DOUBLE DUAL™
Accommodates bi-directional connectivity regardless of the single or dual pole configuration used on either the tractor or trailer.

DOUBLE DUAL™ Application Combination Chart

- Use a DoubleDual™ Assembly Part Number Ending in "MW" (ex. 7DDB522MW)
- Use a DoubleDual™ Assembly Part Number Ending in "XW" (ex. 7DDB522XW)
- Tectran also manufactures a variety of single pole to single pole assemblies. See our website or catalog for more details.

		Vertical	Horizontal	Single Pole
TRACTOR SIDE	Vertical	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	Horizontal	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	Single Pole	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/> Y




DOUBLE DUAL™ PLUG PARTS COVERAGE

DOUBLE DUAL™ PLUG PARTS COVERAGE

Part No.	Stk Code	Length	Lead Length/Connectors	Style	Replaces Standard 2 Pole Part #
7DDB222MW	37514	12'	12" <i>DOUBLE DUAL</i> x 12" <i>DOUBLE DUAL</i>	Coiled with <i>WeatherSeal</i> ™	7DTB222MW 7DV4222MW 7DV6222MW
7DDB222XW	37516	12'	12" <i>DOUBLE DUAL</i> x 12" Single Pole	Coiled with <i>WeatherSeal</i> ™	7DTB222XW
7DDB522MW	37511	15'	12" <i>DOUBLE DUAL</i> x 12" <i>DOUBLE DUAL</i>	Coiled with <i>WeatherSeal</i> ™	7DTB522MW 7DV4522MW 7DV6522MW
7DDB522XW	37517	15'	12" <i>DOUBLE DUAL</i> x 12" Single Pole	Coiled with <i>WeatherSeal</i> ™	7DTB522XW
7DDB524MW	37515	15'	12" <i>DOUBLE DUAL</i> x 24" <i>DOUBLE DUAL</i>	Coiled with <i>WeatherSeal</i> ™	7DTB524MW
7DDB524XW	37518	15'	12" Single Pole x 24" <i>DOUBLE DUAL</i>	Coiled with <i>WeatherSeal</i> ™	7DTB524XW
7DDB542MW	37512	15'	12" <i>DOUBLE DUAL</i> x 48" <i>DOUBLE DUAL</i>	Coiled with <i>WeatherSeal</i> ™	7DTB542MW 7DV4542MW 7DV6542MW
7DDB542XW	37519	15'	12" Single Pole x 48" <i>DOUBLE DUAL</i>	Coiled with <i>WeatherSeal</i> ™	-
7DDD122MW	37520	12'	2 <i>DOUBLE DUAL</i>	Straight with <i>WeatherSeal</i> ™	-
7DDS122XW	37522	12'	1 <i>DOUBLE DUAL</i> & 1 Single Pole	Straight with <i>WeatherSeal</i> ™	-
7DDD152MW	37521	15'	2 <i>DOUBLE DUAL</i>	Straight with <i>WeatherSeal</i> ™	7D152MW
7DDS152XW	37523	15'	1 <i>DOUBLE DUAL</i> & 1 Single Pole	Straight with <i>WeatherSeal</i> ™	7CR152MW
670-DDSG	38796	-	-	Plug Assembly	670-19SG 670-21SG 670-27SG 670-29SG

Innovative Premium Features

- Performance & Flexibility at -85°F
- Heavy duty, fine strand copper for maximum currency transmission
- Screw type terminals for exceptional connectivity
- Superior coil memory and durability
- 110 amp maximum current carrying capacity for continuous 12 volt use
- 200 amp maximum current carrying capacity for intermittent use

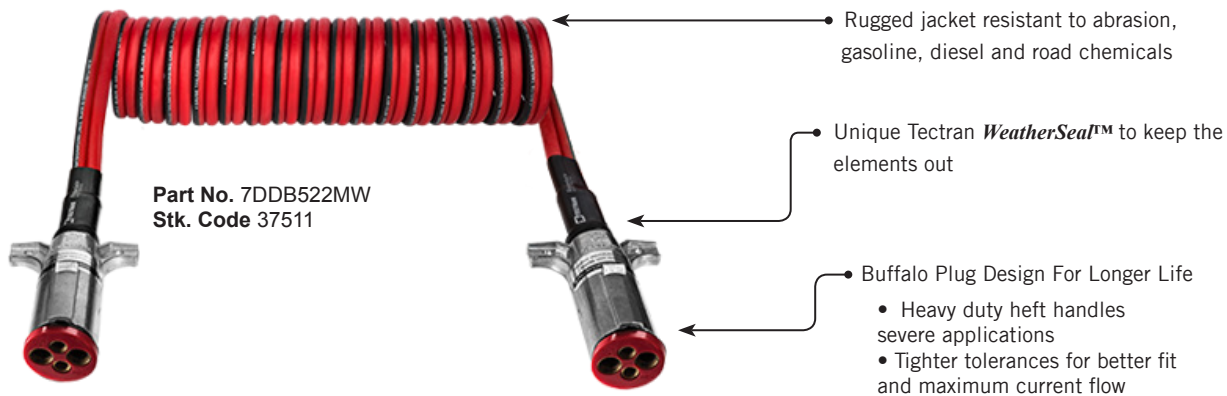

TECTRAN - USA
2345 Walden Ave., Suite 100
Cheektowaga, NY 14225

Ph: 800.776.5549
Fx: 716.894.9623
E: orders@tectran.com

TECTRAN - CANADA
2400 Anson Drive
Mississauga, ON L5S 1G2

Ph: 905.678.7700
Fx: 905.678.6210
E: customerservice@tectran.com

www.tectran.com

Stock # PB20131008
©2018 Tectran
All Rights Reserved.